


P.C.B. LAYOUT (Tolerance: ±0.1)
(BOTTOM VIEW)

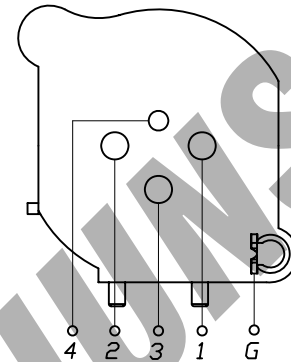

Circuit Diagram

6	SLEEVE	1	QSn6.5-0.1Y t=0.5 (C5191R-H)	NiSn-PLATED RoHS COMPLIANT
5	BODY	1	NYLON(PA66 G20) 94HB BLACK	RoHS COMPLIANT
4	RING SPRING	1	STEEL (65Mn) t=0.4	NI-PLATED RoHS COMPLIANT
3	3#-PIN	1	QSn6.5-0.1Y t=0.5 (C5191R-H)	Au-PLATED RoHS COMPLIANT
2	2#-PIN	1	QSn6.5-0.1Y t=0.5 (C5191R-H)	Au-PLATED RoHS COMPLIANT
1	1#-PIN	1	QSn6.5-0.1Y t=0.5 (C5191R-H)	Au-PLATED RoHS COMPLIANT
NO.	PART NAME	Q'TY	MATERIAL (THICK, COLOR)	REMARK

Dimensions unless otherwise specified	
Size Range	Tolerance
$L \leq 1$	± 0.15
$1 < L \leq 8$	± 0.20
$8 < L \leq 23$	± 0.25
$23 < L \leq 50$	± 0.30
ANGAL	$\pm 1^\circ$

DWN	DATE	SCALE: 2:1	NAME.
DSND	DATE	VIEW:	XLR CONNECTOR
CHKD	DATE	UNIT: mm	CAT.NO.
APVD	DATE		CT3-04HFD-EP
ZHEJIANG CHUNSHENG ELECTRONICS CO.,LTD			Q/CS.QW-001A-CT3-04HFD-EP

旧底图总号	
底图总号	
日期	签名